AECC

Asbestos & Environmental
Consulting Corporation

Soil Vapor Intrusion Sampling Report – Event 2

Former Kalet Building
1-7 State Street
Auburn, New York

Prepared for:

City of Auburn
Memorial City Hall
24 South Street
Auburn, New York 13021

Prepared by:

Asbestos & Environmental Consulting Corporation (AECC)
6296 Fly Road
East Syracuse, New York 13057

AECC
Asbestos & Environmental
Consulting Corporation

May 2, 2011

Mr. Seth Jensen
City Of Auburn - Department of Engineering Services
Memorial City Hall
24 South Street
Auburn, New York 13021

RE: Soil Vapor Intrusion Sampling Report – Event 2
Former Kalet Building – 1-7 State Street, Auburn, New York
AECC Project Number: 11-109

Dear Mr. Jensen:

The Asbestos and Environmental Consulting Corporation (AECC) was retained by the City of Auburn (the "City") to complete a second Soil Vapor Intrusion (SVI) sampling event at the former Kalet Building (the "Property"), located at 1-7 State Street, in Auburn, New York (Figure 1). The following report presents the sampling protocol, analytical results, summary, conclusions, and recommendations resulting from the SVI sampling event conducted on April 22, 2011. We have also included the results of the first sampling event conducted on February 9, 2011 (see Table 1).

BACKGROUND

Two (2) SVI sampling events were conducted in response to a potential environmental concern identified in AECC's Phase I Environmental Site Assessment (ESA), dated April 16, 2009 (prepared for Musical Theatre Festival, Inc., a copy of which was provided to the City). The potential environmental concern identified in the 2009 Phase I ESA was a former dry cleaning facility, located approximately 150 feet northwest of the Property. Since no evidence was found indicating a spill or release at the former dry cleaning facility and the fact that it was located potentially hydrologically down-gradient, AECC did not identify it as a recognized environmental condition (REC); but rather as a potential environmental concern. This interpretation was offered because the flow of groundwater in the immediate area surrounding the Property is not certain.

The first SVI sampling event was conducted on February 9, 2011, at which time the former Kalet Building was a vacant, three-story structure (including basement). The building was in significant disrepair and scheduled for demolition in the near future. Details of the sampling event and the results were presented to the City in AECC's Soil Vapor Intrusion Sampling Report, dated February 17, 2011.

Asbestos & Environmental Consulting Corp. ~ 6296 Fly Road, East Syracuse, NY 13057 ~ (315) 432-9400 ~ (315) 432-9405 fax

The second SVI sampling event was conducted on April 22, 2011, during demolition of the building. At the time, the Property consisted of building debris and clean stone used for fill material. The demolition work was being completed above the former basement concrete slab in an asbestos abatement regulated work area. The concrete slab in the basement was accessible in three locations for sampling (see Figure 2).

SCOPE OF SERVICES

The SVI sampling was completed in accordance with New York State Department of Health's (NYSDOH) October 2006 *Guidance for Evaluating Soil Vapor Intrusion in the State of New York* ("Guidance"). A total of five (5) samples were collected, specifically: three (3) sub-slab vapor samples (SS-4, SS-5, and SS-6), one (1) sub-slab duplicate sample (SS-5D), and one (1) outdoor air sample (OA). The locations of the samples are depicted on Figure 2 of this report along with the sample locations from the first sampling event, conducted on February 9, 2011 (SS-1, SS-2, SS-3, IA, and OA). Photographs of the second event sampling locations are provided in Attachment A.

The sub-slab samples were collected from below the concrete slab in the former basement of the building (Figure 2). At each sub-slab sample location, a hammer drill was used to drill a 5/8-inch diameter hole through the concrete slab. The thickness of the slab was approximately 6 inches thick at sampling locations SS-5, SS-5D and SS-6. At sampling location SS-4, two (2) slabs were present; the top slab which was approximately 3 inches thick and the bottom slab which was approximately 15 inches thick.

Upon completion of each drill hole, 3/8-inch (outer diameter) polyethylene tubing was inserted no further than 2 inches below the bottom of the concrete slab. The tubing was then sealed at the surface of the concrete slab using modeling clay.

The integrity of each seal was tested using a stainless steel shroud and laboratory-provided helium. The shroud was placed over each sampling location with the sample tubing connected to the outside of the shroud. The atmosphere in the shroud was then enriched with helium, while a Restek® Electronic Leak Detector monitored the sampling point below the slab for a breach in the clay seal. Once the integrity of each seal was verified, the shroud was removed and approximately 0.06 liters of vapor was purged from the tubing using a disposable plastic syringe at a rate no greater than 0.2 liters per minute. A pre-calibrated regulator (prepared by the analytical laboratory), was then connected to each location, followed by the connection of a 1 liter, stainless steel, Silonite-coated, MiniCan® sampling canister. The SVI sampling log is included in Attachment B.

The outdoor air sample (OA) was placed upwind of the Property, near the corner of State Street and Genesee Street (Figure 2). The OA sample was collected as described above, however the sampling train was not connected to a sub-slab sampling point, but was opened to the ambient atmosphere for the duration of sampling.

Asbestos & Environmental Consulting Corp. ~ 6296 Fly Road, East Syracuse, NY 13057 ~ (315) 432-9400 ~ (315) 432-9405 fax

At the end of the sampling interval, the canisters were collected and each hole was screened with a photoionization detector (PID)[1]. The samples were delivered under strict chain-of-custody protocols to Centek Laboratories, LLC in Syracuse, New York for analysis of volatile organic compounds (VOCs) using United States Environmental Protection Agency (US EPA) Method TO-15.

FIELD OBSERVATIONS

During the April 22, 2011 SVI sampling event, AECC observed and recorded conditions at the Property having the potential to influence sample analytical results. These observations included the condition of the building, activities in the building, and inventory of any chemicals or containers within the building, and are further discussed below.

At the time of the April 22, 2011 sampling event, demolition was well under way, and the building had been dismantled to the basal/foundation concrete slab. Approximately, half of the building debris was still present on the slab. The concrete slab ranges from approximately 6- to 18- inches in thickness. As part of the demolition specifications, 10-inch diameter holes were to be punched through the slab on a 15-foot grid/perforation pattern to facilitate water percolation. Approximately, one half of the slab had been perforated prior to the soil vapor sampling event. The southern half of the slab was covered by building debris generated through demolition. A screening of the ambient air on the slab, prior to the SVI sampling registered no PID response.

No containers of chemicals or fluids were observed in the building debris. The hazardous/universal wastes, including containers and equipment containing lubricants or potentially volatile materials, were removed from the building prior to demolition.

The following conditions were observed at the Property at the time of SVI sampling Event 2 and should be noted due to their potential to affect sample results:

- The building was constructed in an urban setting. Due to this fact, the potential exists for various sources of emissions from nearby properties, buildings, and vehicles to influence the air samples.

- During demolition activities prior to sampling, a hydraulic line on an excavator was damaged, releasing reportedly less than one quart of hydraulic fluid amongst the building debris in an approximate 10-foot radius area. The spill was contained and the debris was subsequently loaded out into trucks and transported to the landfill for disposal.

- The demolition produced large debris piles which were present during the sampling event. The debris piles were wetted down with municipal water during the demolition to minimize airborne dust. Residual water was present on some areas of the slab and likely drained through several of the aforementioned 10-inch diameter penetrations, potentially transporting substances from the debris piles into the subsurface.

[1] MiniRAE 2000; 10.6 eV Lamp

Asbestos & Environmental Consulting Corp. ~ 6296 Fly Road, East Syracuse, NY 13057 ~ (315) 432-9400 ~ (315) 432-9405 fax

- The municipal water used for dust control is chlorinated. As such, off-gassed byproducts of the chlorination process may contribute to the volatile organic compounds (VOCs) detected in both the ambient and sub-slab soil vapor samples.

- The 10-inch holes punched in the concrete slab to facilitate percolation of water, may have allowed for "venting" of volatile compounds from below the slab, which would cause the results of SVI sampling to be biased low.

ANALYTICAL RESULTS

The SVI samples were collected and delivered under chain-of-custody protocols to Centek Laboratories, LLC of Syracuse, New York for analysis of VOCs using US EPA Method TO-15. A summary of analytical results for both sampling events are presented in Table 1. The laboratory report for the samples collected on Event 2 (April 22, 2011) is provided as Attachment C.

Twenty-nine (29) VOCs were detected at very low concentrations in the sub-slab soil vapor samples and/or the outdoor air samples collected during the April 22, 2011 sampling event. Twenty-one (21) of the VOCs were detected only in sub-slab soil vapor samples, and one (1) compound, isopropyl alcohol, was detected only in the outdoor air sample (OA). Six (6) VOCs (methyl ethyl ketone, styrene, methylene chloride, isopropyl alcohol, 1,2,-dichloroethane and bromodichloromethane) were not detected during the initial sampling event conducted in February 2011.

With the exception of isopropyl alcohol (detected only in sample OA), acetone (detected in sample SS-5), and the concentrations of VOCs detected in the outdoor air samples, the results were lower than the concentrations of those VOCs detected in sub-slab samples. This suggests that ambient (outside) air is not the source of VOCs detected in the sub-slab samples.

Several of the VOCs detected in the sub-slab samples are common laboratory contaminants (e.g., acetone and methylene chloride), and some, including bromodichloromethane and chloroform may be attributable to off-gassing of chlorinated municipal water. Other constituents detected in the sub-slab samples may be the result of historic spills proximal to the property, or may derive from leaking sewers adjacent to or underlying the property.

Several chlorinated VOCs including 1,1,1-Trichloroethane (1,1,1-TCA), 1,2-dichloroethane (1,2-DCE), carbon tetrachloride, tetrachloroethylene (PCE), trichloroethene (TCE), cis-1,2-dichloroethene (cis-1,2-DCE), are commonly used or associated with degreasing and/or dry cleaning operations (or are byproducts of the degradation of the parent materials), and their presence in the sub-slab samples may also be attributable to proximal spills (recent or historic) or leaking sewer lines in the vicinity of the property.

CONCLUSIONS AND RECOMMENDATIONS

The NYSDOH October 2006 Guidance includes matrices for decision making purposes; one specifically for the VOCs carbon tetrachloride and TCE, and the second for PCE and 1,1,1-TCA.

Asbestos & Environmental Consulting Corp. ~ 6296 Fly Road, East Syracuse, NY 13057 ~ (315) 432-9400 ~ (315) 432-9405 fax

The decision matrices compare sub-slab concentrations of the compounds to indoor-air concentrations of the compounds. The April 2011 sub-slab data were compared to the February 2011 indoor air data (no "indoor" sample to collect during the April 2011 event). For TCE, PCE and 1,1,1-TCA, the matrices indicate that no further action is required. For carbon tetrachloride, the matrix indicates that monitoring should be implemented as an interim measure to determine whether further action is necessary.

It is noted that the original indoor air sample was collected from the basement of the badly damaged building that was open to ambient air outside the building. Broken windows and similar features in the former building were not typical of a well-maintained, insulated, heated and occupied building as intended in the development of the NYSDOH October 2006 Guidance. Based on these conditions and on the fact that many VOCs (beyond the four compounds used in the decision making matrices) were detected in the sub-slab soil vapor samples, more conservative actions may be appropriate than those derived through strict interpretation of the NYSDOH October 2006 Guidance.

Based on AECC's interpretation of the analytical data discussed above, the NYSDOH October 2006 Guidance, taking into consideration the conditions under which the indoor air sample was collected during the February 2011 sampling event, AECC recommends the following:

- Measures should be taken to mitigate future potential exposures to compounds present in sub-slab soil vapors. The most common mitigation methods are sealing preferential pathways or installing a vapor barrier, in conjunction with the installation of a sub-slab depressurization system.
- Additional monitoring of indoor air quality may be appropriate after future building construction, to verify that vapor barrier and/or sub-slab depressurization system is effective in mitigating intrusion of sub-slab VOCs of concern into the future structures.
- Although not required by regulation, AECC recommends providing the NYSDEC a copy of these results, as a courtesy, for the possible proximal spills that may have occurred in the area.

LIMITATIONS

AECC performed services in a manner consistent with the level of care and expertise exercised by members of the environmental consulting industry operating in similar conditions during the same time as our services were rendered.

The assessment, conclusions, and recommendations presented are based on a subjective evaluation of limited data. They may not represent all conditions at the Property, as they reflect the information gathered from specific locations during a specific timeframe.

Our services consist of professional opinions and recommendations made in accordance with generally accepted environmental consulting principles and practices, and are designed to provide an analytical tool to assist the Client. AECC, or those representing AECC, bear no responsibility for the actual condition of the structure or safety of a site pertaining to Indoor Air

Asbestos & Environmental Consulting Corp. ~ 6296 Fly Road, East Syracuse, NY 13057 ~ (315) 432-9400 ~ (315) 432-9405 fax

Quality (IAQ) or Soil Vapor Intrusion (SVI) regardless of the actions taken by the Client. Changes in the Property conditions, building environment, Property activities, control operation and remedial actions may affect our recommendations.

If you have any questions pertaining to this report, please contact our office at (315) 432-9400. We appreciate the opportunity to work with you on this project and look forward to working with you again in the future.

Sincerely,
Asbestos & Environmental Consulting Corporation

John T. Imhoff
Senior Project Manager

Figures

Figure 1: Property Location Map
Figure 2: Soil Vapor Intrusion Sampling Locations

Tables

Table 1: Summary of SVI Analytical Results, Events #1 and #2

Attachments

Attachment A: Photograph Log of Sampling Locations
Attachment B: SVI Sampling Log
Attachment C: Laboratory Analytical Results (includes Chain-of-Custody form)

Asbestos & Environmental Consulting Corp. ~ 6296 Fly Road, East Syracuse, NY 13057 ~ (315) 432-9400 ~ (315) 432-9405 fax

FIGURES

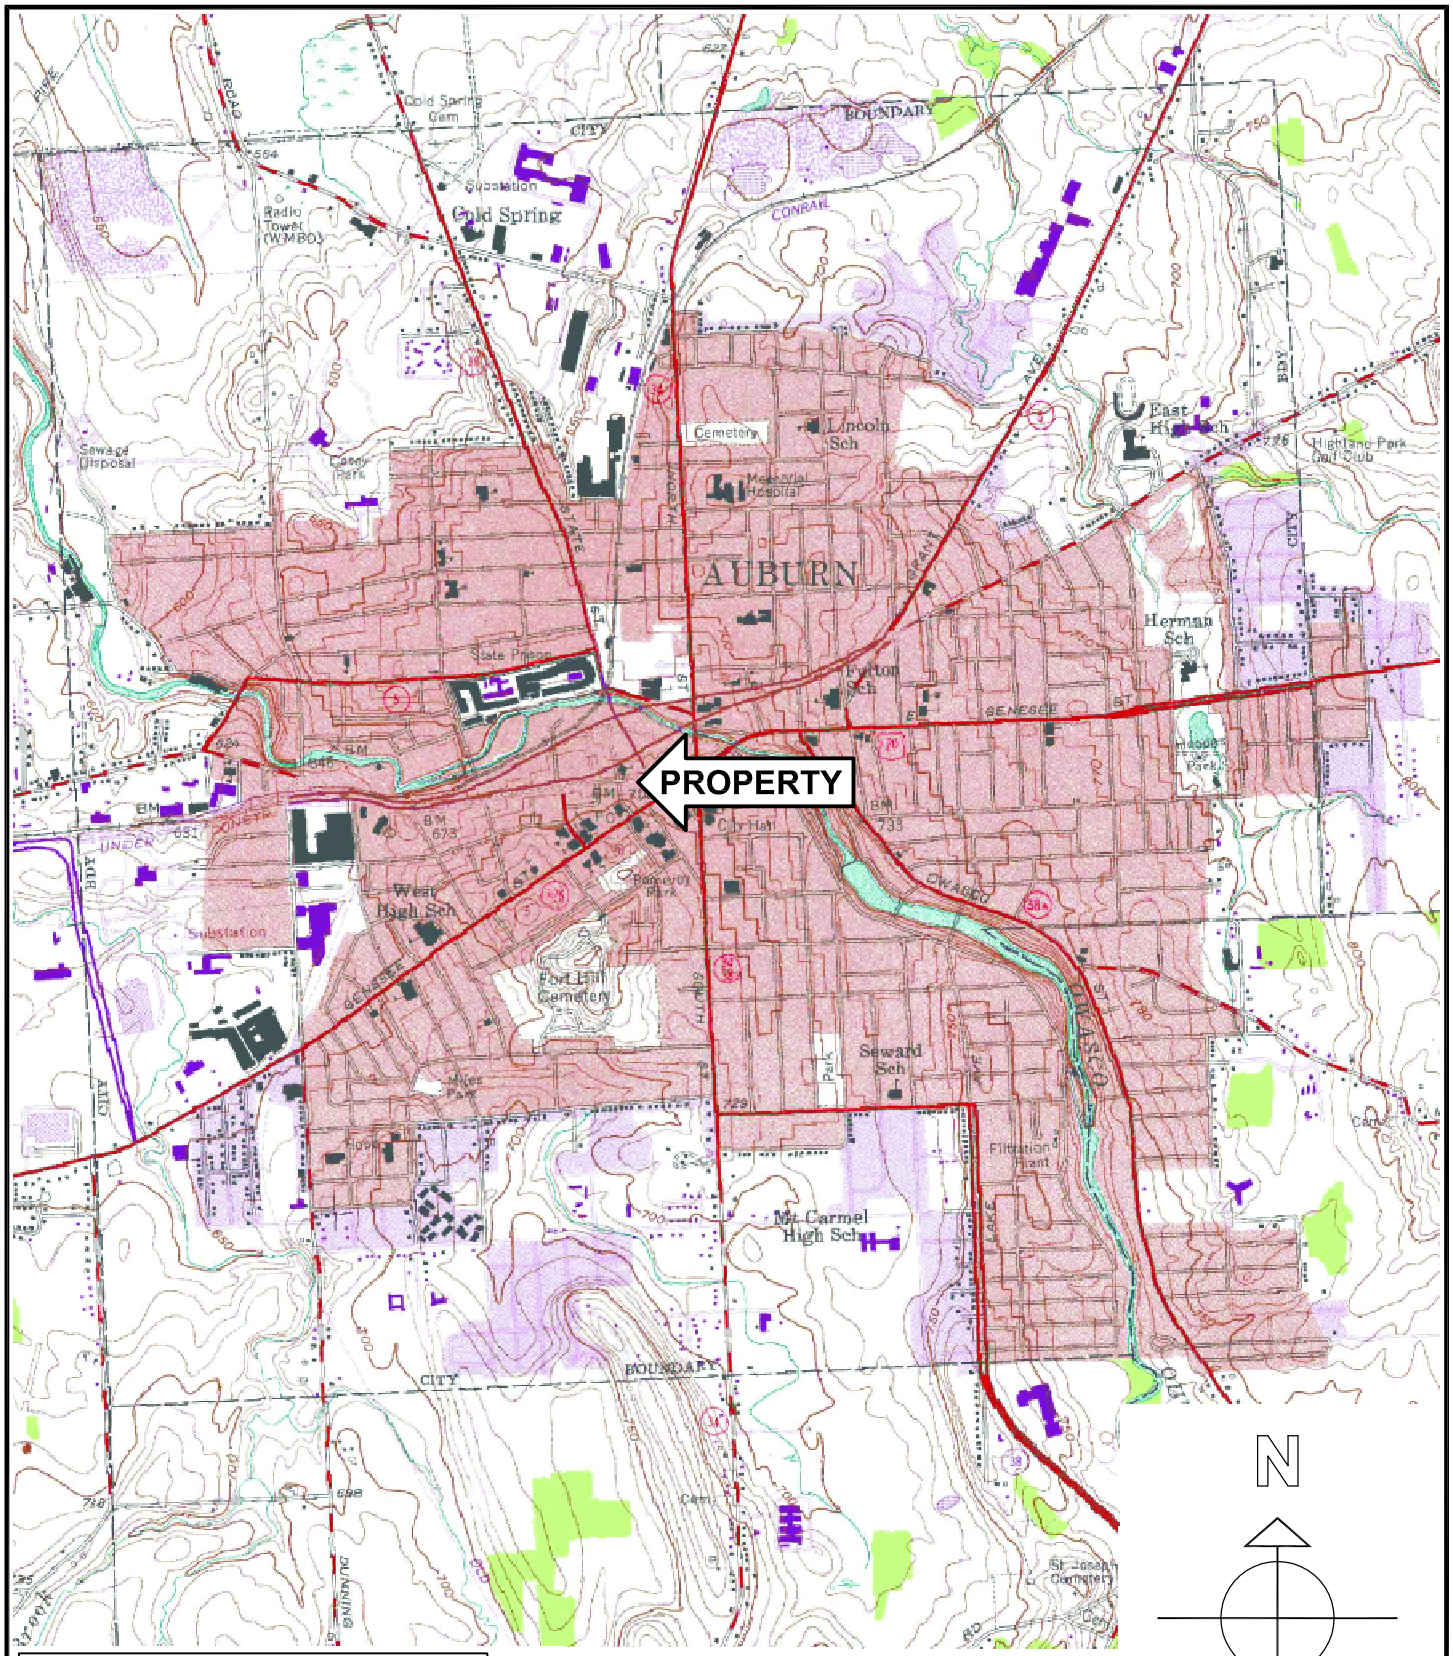

The information included on this graphic representation has been compiled from a variety of sources and is subject to change without notice. Kleinfelder makes no representations or warranties, express or implied, as to accuracy, completeness, timeliness, or rights to the use of such information. This document is not intended for use as a land survey product nor is it designed or intended as a construction design document. The use or misuse of the information contained on this graphic representation is at the sole risk of the party using or misusing the information.

AECC Asbestos & Environmental Consulting Corporation 6296 Fly Road, Suite 2 East Syracuse, NY 13057	PROJECT NO. 11-109 DRAWN: APR 2011 DRAWN BY: HHM CHECKED BY: JTI FILE NAME:	**The Kalet Building** **Property Location Map** **1 State Street, Auburn, N.Y.**	FIGURE **1**

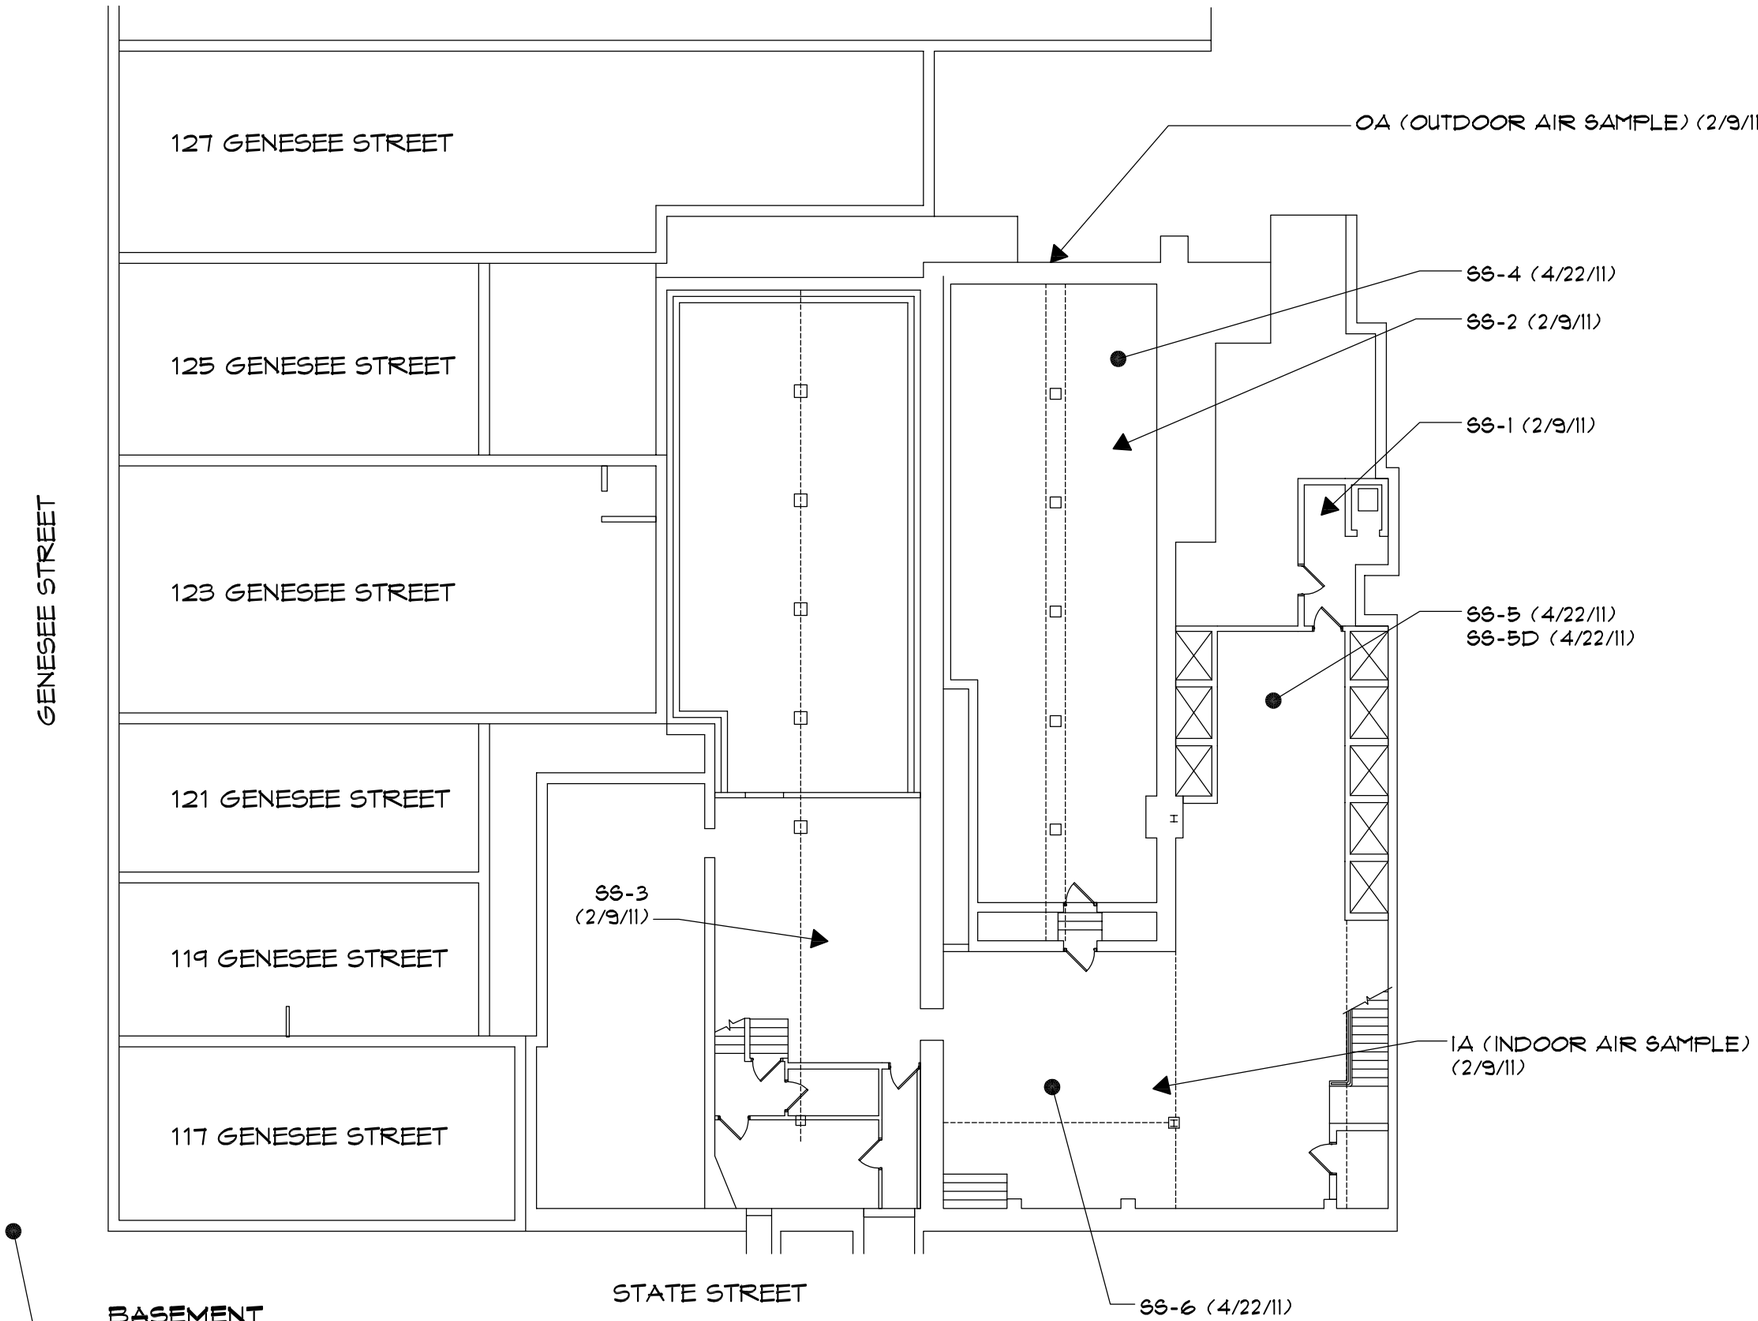

BASEMENT

LEGEND:

▲ SOIL VAPOR INTRUSION SAMPLING LOCATIONS (2/9/11)

● SOIL VAPOR INTRUSION SAMPLING LOCATIONS (4/22/11)

16' 8' 0 16'

APPROXIMATE SCALE (feet)

THE INFORMATION INCLUDED ON THIS GRAPHIC REPRESENTATION HAS BEEN COMPILED FROM A VARIETY OF SOURCES AND IS SUBJECT TO CHANGE WITHOUT NOTICE. AECC MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, AS TO ACCURACY, COMPLETENESS, TIMELINESS, OR RIGHTS TO THE USE OF SUCH INFORMATION. THIS DOCUMENT IS NOT INTENDED FOR USE AS A LAND SURVEY PRODUCT NOR IS IT DESIGNED OR INTENDED AS A CONSTRUCTION DESIGN DOCUMENT. THE USE OR MISUSE OF THE INFORMATION CONTAINED ON THIS GRAPHIC REPRESENTATION IS AT THE SOLE RISK OF THE PARTY USING OR MISUSING THE INFORMATION.

AECC
Asbestos & Environmental Consulting Corporation
6296 Fly Road, Suite 2
East Syracuse, NY 13057

PROJECT NO.	11-109
DRAWN:	APR 2011
DRAWN BY:	HHM
CHECKED BY:	JTI
FILE NAME:	

The Kalet Building
Soil Vapor Intrusion Sampling Locations
Basement
1 State Street, Auburn, N.Y.

FIGURE

2

TABLES

Table 1

Summary of SVI Analytical Results, Events #1 and #2
Former Kalet Building
1-7 State Street
Auburn, New York

	SVI Sampling Event #1 - February 9, 2011					SVI Sampling Event #2 - April 22, 2011				
Volatile Organic Compound	**SS-1** 2/9/2011	**SS-2** 2/9/2011	**SS-3** 2/9/2011	**IA** 2/9/2011	**OA** 2/9/2011	**SS-4** 4/22/2011	**SS-5** 4/22/2011	**SS-5D** 4/22/2011	**SS-6** 4/22/2011	**OA** 4/22/2011
1,1,1-Trichloroethane	**3.2**	**1.4**	**0.61 J**	<0.83	<0.83	**0.67 J**	**0.72 J**	**2.1**	<0.83	<0.83
1,1,2,2-Tetrachloroethane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
1,1,2-Trichloroethane	<0.83	<0.83	<0.83	<0.83	<0.83	<0.83	<0.83	<0.83	<0.83	<0.83
1,1-Dichloroethane	<0.62	<0.62	<0.62	<0.62	<0.62	<0.62	<0.62	<0.62	<0.62	<0.62
1,1-Dichloroethene	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60
1,2,4-Trichlorobenzene	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1
1,2,4-Trimethylbenzene	**1.5**	**1.3**	**1.2**	**28**	**1.2**	**1.7**	**1.4**	**1.4**	**2.7**	**1.2**
1,2-Dibromoethane	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2
1,2-Dichlorobenzene	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92
1,2-Dichloroethane	<0.62	<0.62	<0.62	<0.62	<0.62	<0.62	<0.62	<0.62	**1.5**	<0.62
1,2-Dichloropropane	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70
1,3,5-Trimethylbenzene	**0.55 J**	<0.75	<0.75	**11**	<0.75	<0.75	<0.75	<0.75	**0.75 J**	<0.75
1,3-Butadiene	<0.34	<0.34	<0.34	<0.34	<0.34	<0.34	<0.34	<0.34	<0.34	<0.34
1,3-Dichlorobenzene	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92
1,4-Dichlorobenzene	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92
1,4-Dioxane	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1
2,2,4-Trimethylpentane	**3.1**	**1.8**	**10**	**67**	**1.5**	**1.7**	**0.90**	**1.1**	**0.62 J**	<0.71
4-Ethyltoluene	<0.75	<0.75	<0.75	**9.8**	<0.75	<0.75	<0.75	<0.75	**0.60 J**	<0.75
Acetone	**24**	**44**	<0.72	**28**	**22**	**39**	**7.5**	**13**	**41**	**13**
Allyl chloride	<0.48	<0.48	<0.48	<0.48	<0.48	<0.48	<0.48	<0.48	<0.48	<0.48
Benzene	**5.4**	**8.4**	**5.5**	**45**	**1.8**	**17**	**4.6**	**5.0**	**6.1**	**0.55**
Benzyl Chloride	<0.88	<0.88	<0.88	<0.88	<0.88	<0.88	<0.88	<0.88	<0.88	<0.88
Bromodichloromethane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	**1.4**	<1.0
Bromoform	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6
Bromomethane	<0.59	<0.59	<0.59	<0.59	<0.59	<0.59	<0.59	<0.59	<0.59	<0.59
Carbon disulfide	**1.1**	**17**	**9.2**	<0.47	<0.47	**28**	**1.7**	**1.9**	**7.6**	<0.47
Carbon tetrachloride	**36**	**4**	**9.1**	**0.45**	**0.51**	**1.7**	**7.5**	**8.2**	**4.2**	<0.96
Chlorobenzene	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70	<0.70
Chloroethane	<0.40	<0.40	<0.40	<0.40	<0.40	<0.40	<0.40	<0.40	<0.40	<0.40
Chloroform	**45**	**2.9**	**4.8**	<0.74	<0.74	**14**	**5.1**	**5.5**	**31**	<0.74
Chloromethane	<0.31	<0.31	<0.31	**0.84**	**1.1**	<0.31	**0.73**	<0.31	<0.31	<0.31
cis-1,2-Dichloroethene	**0.64**	**1.6**	**0.77**	<0.60	<0.60	**0.81**	<0.60	**0.44 J**	<0.60	<0.60
cis-1,3-Dichloropropene	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69
Cyclohexane	**10**	**16**	**47**	**39**	<0.52	**54**	**20**	**22**	**14**	<0.52

Table 1
Summary of SVI Analytical Results, Events #1 and #2
Former Kalet Building
1-7 State Street
Auburn, New York

	SVI Sampling Event #1 - February 9, 2011					SVI Sampling Event #2 - April 22, 2011				
Volatile Organic Compound	**SS-1** 2/9/2011	**SS-2** 2/9/2011	**SS-3** 2/9/2011	**IA** 2/9/2011	**OA** 2/9/2011	**SS-4** 4/22/2011	**SS-5** 4/22/2011	**SS-5D** 4/22/2011	**SS-6** 4/22/2011	**OA** 4/22/2011
Dibromochloromethane	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3
Ethyl Acetate	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92	<0.92
Ethylbenzene	**1.5**	**1.3**	**1.3**	**30**	**1**	**2.2**	**1.1**	**1.2**	**3.2**	<0.66
Freon 11	**4.6**	**3**	**2.2**	**2.3**	**2.7**	**2.9**	**2.4**	**3.9**	**1.3**	**1.1**
Freon 113	<1.2	**0.86**	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2
Freon 114	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1	<1.1
Freon 12	**5.6**	**10**	**8**	**2.8**	**3.1**	**71**	**68**	**77**	**2.9**	**2.3**
Heptane	**12**	**15**	**220**	**35**	**1.1**	**63**	**16**	**17**	**17**	<0.62
Hexachloro-1,3-butadiene	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6	<1.6
Hexane	**21**	**28**	**420**	**140**	**2.1**	**94**	**42**	**44**	**28**	<0.54
Isopropyl alcohol	<0.37	<0.37	<0.37	<0.37	<0.37	<0.37	<0.37	<0.37	<0.37	**3.6**
m&p-Xylene	**3.9**	**3.3**	**3.4**	**99**	**2.7**	**6.7**	**3.2**	**3.6**	**11**	**0.97 J**
Methyl Butyl Ketone	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2
2-Butanone (MEK)	<0.90	<0.90	<0.90	<0.90	<0.90	<0.90	**1.8**	<0.90	<0.90	<0.90
Methyl Isobutyl Ketone	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2	<1.2
MTBE	<0.55	<0.55	<0.55	<0.55	<0.55	<0.55	<0.55	<0.55	<0.55	<0.55
Methylene Chloride	<0.53	<0.53	<0.53	<0.53	<0.53	<0.53	**1.6**	<0.53	<0.53	<0.53
o-Xylene	**1.6**	**1.5**	**1.4**	**35**	**1.1**	**2.1**	**1.1**	**1.2**	**3.4**	<0.66
Propylene	<0.26	<0.26	<0.26	<0.26	<0.26	<0.26	<0.26	<0.26	<0.26	<0.26
Styrene	<0.65	<0.65	<0.65	<0.65	<0.65	<0.65	**0.91**	**0.95**	<0.65	<0.65
Tetrachloroethylene	**0.76 J**	**1.4**	**3**	<1.0	<1.0	**3.0**	**0.90 J**	**1.0**	**2.8**	<1.0
Tetrahydrofuran	<0.45	<0.45	<0.45	<0.45	<0.45	<0.45	<0.45	<0.45	<0.45	<0.45
Toluene	**6.1**	**5**	**5.1**	**190**	**3.9**	**16**	**2.6**	**3.1**	**6.3**	**0.77**
trans-1,2-Dichloroethene	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60	<0.60
trans-1,3-Dichloropropene	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69	<0.69
Trichloroethene	**3.6**	**6.7**	**4.4**	<0.22	<0.22	**4.5**	**1.9**	**2.0**	**5.8**	<0.82
Vinyl Acetate	<0.54	<0.54	<0.54	<0.54	<0.54	<0.54	<0.54	<0.54	<0.54	<0.54
Vinyl Bromide	<0.67	<0.67	<0.67	<0.67	<0.67	<0.67	<0.67	<0.67	<0.67	<0.67
Vinyl Chloride	<0.39	<0.39	<0.39	<0.10	<0.10	<0.39	<0.39	<0.39	<0.39	<0.39

Notes:
All units in micrograms per cubic meter (ug/m3)
Bold - Compound Detected
J = reported concentration at or below the method quantification limit.
Samples Analyzed by US EPA Method TO-15

ATTACHMENTS

ATTACHMENT A

Photograph Log of Sampling Locations

AECC

Asbestos & Environmental
Consulting Corporation

Attachment A

Kalet Building SVI Sampling Locations

Photo Number # 1
Location: View of sub-slab vapor sample location SS-4 (looking southwest).
Date: 4/22/11

Photo Number #2
Location: Close-up view of sub-slab vapor sample location SS-4 (looking south).
Date 4/22/11

AECC

Asbestos & Environmental
Consulting Corporation

Photo Number # 3
Location: View of sub-slab vapor sample location SS-5, and duplicate sample location SS-5D (looking south).
Date: 4/22/11

Photo Number # 4
Location: View of outdoor air sample location OA (looking southwest).
Date: 4/22/11

ATTACHMENT B

SVI Sampling Log

AECC
Asbestos & Environmental Consulting Corporation

Soil Vapor Intrusion Sampling Log

AECC Project No: 11-109	Field Technician's Name: J. SANDBERG / B. CONKRAN
Site Name: KALET BUILDING.	Date: 4/22/11
Site Address: 1-7 STATE ST. AUBURN, NY	Weather: OVERCAST, SE WIND, ~38°F

Sample ID	Date	Helium Test Successful?	Sampling Depth	Purge Volume	Volume Extracted	Time Start	Time Stop	Duration hrs.min	Vacuum Start	Vacuum Stop	Canister Volume	Canister SN	Regulator SN	PID (ppm)
SS-1	4/22/11	✓	~16"	60cc →		0915	1109	114	-28" Hg	-1" Hg	1 LITER	419	153	0.0
SS-2	↓	✓	~6"	60cc →		0926	1115	109	-27" Hg	-1" Hg	↓	327	397	1.1
SS-2D	↓	✓	~6"	60cc →		0926	1115	109	-27" Hg	-1" Hg	↓	197	397	1.1
SS-3	↓	✓	~6"	60cc →		0936	1119	103	-28" Hg	0" Hg	↓	495	377	0.3
OA	↓	—	—	—	—	0947	1136	109	-28" Hg	-2" Hg	↓	334	293	0.0

Notes:

ATTACHMENT C

Laboratory Analytical Results (includes Chain-of-Custody Form)

CENTEK LABORATORIES, LLC

143 Midler Park Drive * Syracuse, NY 13206
Phone (315) 431-9730 * Emergency 24/7 (315) 416-2752
NYSDOH ELAP Certificate No. 11830

Analytical Report

Josh Sandberg
Asbetos & Environmental Consulting Corporation
6296 Fly Road
Syracuse, NY 13057

TEL: (315) 432-9400
FAX: (315) 432-9405

Friday, April 29, 2011
Order No.: C1104042

RE: Auburn - Kalet Bldg - Round II - 11-109

Dear Josh Sandberg:

Centek Laboratories, LLC received 5 sample(s) on 4/22/2011 for the analyses presented in the following report.

I certify that this data package is in compliance with the terms and conditions of the Contract, both technically and for completeness. Release of the data contained in this hardcopy data package and/or in the computer readable data submitted has been authorized by the Laboratory Manager or his designee, as verified by the following signature.

Centek Laboratories performs all analyses according to EPA, NIOSH or OSHA-approved analytical methods. Centek Laboratories is dedicated to providing quality analyses and exceptional customer service. All method blanks, laboratory spikes, and/or matrix spikes met quality assurance objective except as indicated in the case narrative. All samples were received and analyzed within the EPA recommended holding times. Test results are not Method Blank (MB) corrected for contamination.

We do our best to make our reporting format clear and understandable and hope you are thoroughly satisfied with our services. Please contact your client service representative at (315) 431-9730 or myself, if you would like any additional information regarding this report.

Thank you for using Centek Laboratories. This report can not be reproduced except in its entirety, without prior written authorization.

Sincerely,

Russell J. Pellegrino
Technical Director

Disclaimer: The test results and procedures utilized, and laboratory interpretations of the data obtained by Centek as contained in this report are believed by Centek to be accurate and reliable for sample(s) tested. In accepting this report, the customer agrees that the full extent of any and

all liability for actual and consequential damages of Centek for the services performed shall be equal to the fee charged to the customer for the services as liquidated damages.

Centek Laboratories, LLC Terms and Conditions

Sample Submission

All samples sent to Centek Laboratories should be accompanied by our Request for Analysis Form or Chain of Custody Form. A Chain of Custody will be provided with each order shipped for all sampling events, or if needed, one is available at our website www.CentekLabs.com. Samples received after 3:00pm are considered to be a part of the next day's business.

Sample Media

Samples can be collected in an canister or a Tedlar bag. Depending on your analytical needs, Centek Laboratories may receive a bulk, liquid, soil or other matrix sample for headspace analysis.

Blanks

Every sample is run with a surrogate or tracer compound at a pre-established concentration. The surrogate compound run with each sample is used as a standard to measure the performance of each run of the instrument. If required, a Minican can be provided containing nitrogen to be run as a trip blank with your samples.

Sampling Equipment

Centek Laboratories will be happy to provide the canisters to carry-out your sampling event at no charge. The necessary accessories, such as regulators, tubing or personal sampling belts, are also provided to meet your sampling needs. The customer is responsible for all shipping charges to the client's destination and return shipping to the laboratory. Client assumes all responsibility for lost, stolen and any damages of equipment.

Turn Around time (TAT)

Centek Laboratories will provide results to its clients in one business-week by 6:00pm EST after receipt of samples. For example, if samples are received on a Monday they are due on the following Monday by 6:00pm EST. Results are faxed or emailed to the requested location indicated on the Chain of Custody. Non-routine analysis may require more than the one business-week turnaround time. Please confirm non-routine sample turnaround times.

Reporting

Results are emailed or faxed at no additional charge. A hard copy of the result report is mailed within 24 hours of the faxing or emailing of your results. Cat "B" like packages are within 3-4 weeks from time of analysis. Standard Electronic Disk Deliverables (EDD) is also available at no additional charge.

Payment Terms

Payment for all purchases shall be due within 30 days from date of invoice. The client agrees to pay a finance charge of 1.5% per month on the overdue balance and cost of collection, including attorney fees, if collection proceedings are necessary. You must have a completed credit application on file to extend credit. Purchase orders or checks information must be submitted for us to release results

Rush Turnaround Samples

Expedited turn around times is available. Please confirm rush turnaround times with Client Services before submitting samples.

Applicable Surcharges for Rush Turnaround Samples:
Same day TAT = 200%
Next business day TAT by Noon = 150%
Next business day TAT by 6:00pm = 100%
Second business day TAT by 6:00pm = 75%
Third business day TAT by 6:00pm = 50%
Fourth business day TAT by 6:00pm = 35%
Fifth business day = Standard

Statement of Confidentiality

Centek Laboratories, LLC is aware of the importance of the confidentiality of results to many of our clients. Your name and data will be held in the strictest of confidence. We will not accept business that may constitute a conflict of interest. We commonly sign Confidential Nondisclosure Agreements with clients prior to beginning work. All research, results and reports will be kept strictly confidential. Secrecy Agreements and Disclosure Statements will be signed for the client if so specified. Results will be provided only to the addressee specified on the Chain of Custody Form submitted with the samples unless law requires release. Written permission is required from the addressee to release results to any other party.

Limitation on Liability

Centek Laboratories, LLC warrants the test results to be accurate to the methodology and sample type for each sample submitted to Centek Laboratories, LLC. In no event shall Centek Laboratories, LLC be liable for direct, indirect, special, punitive, incidental, exemplary or consequential damages, or any damages whatsoever, even if Centek Laboratories, LLC has been previously advised of the possibility of such damages whether in an action under contract, negligence, or any other theory, arising out of or in connection with the use, inability to use or performance of the information, services, products and materials available from the laboratory or this site. These limitations shall apply notwithstanding any failure of essential purpose of any limited remedy. Because some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of liability for consequential or incidental damages, the above limitations may not apply to you. This is a comprehensive limitation of liability that applies to all damages of any kind, including (without limitation) compensatory, direct, indirect or consequential damages, loss of data, income or profit and or loss of or damage to property and claims of third parties.

CENTEK LABORATORIES, LLC

Date: *02-May-11*

CLIENT: Asbetos & Environmental Consulting Corpo

Project: Auburn - Kalet Bldg - Round II - 11-109

Lab Order: C1104042

CASE NARRATIVE

All method blanks, laboratory spikes, and/or matrix spikes met quality assurance objective except as indicated in the corrective action report(s). All samples were received and analyzed within the EPA recommended holding times. Test results are not Method Blank (MB) corrected for contamination. Samples were analyzed using the methods outlined in the following references:

Compendium of Methods for the Determination of Toxic Organic Compounds, Compendium Method TO-15, January 1999.

Centek Laboratories

Chain of Custody

143 Midler Park Drive
Syracuse, NY 13212
Contact #'s Lower Right
www.CentekLabs.com

Site Name: KALET BLDG.
Project: 11-109
PO#: 11-109
Other:

Detection Limit		Report Level	
☐	5ppbv	☑	Level I
☑	1ug/M3	☐	Level II
☐	1ug/M3 +TCE .25	☐	Cat "B" Like

Turnaround Time:	Check One	Rush TAT Surcharge %	Due Date:
5 Business Days	☑	0%	4/29/11
4 Business Days	☐	35%	
3 Business Days	☐	50%	
2 Business Days	☐	75%	
Next Day by 5pm	☐	100%	
Next Day by Noon	☐	150%	
Same Day	☐	200%	

Company: AECC
Report: J. SANDBERG
6296 FLY ROAD
EAST SYRACUSE, NY
Phone: 315 877 6804
Fax: 315 432 9405
Email: jsandberg@aeccgroup.com

Company: Same
Invoice:
Phone:
Fax:
Email:

Sample ID	Date Sampled	Canister Number	Regulator Number	Analysis Request	Comments	Vacuum Start/Stop
SS-1	4/22/11	419	153	TO-15		-28"Hg / -1"Hg
SS-2	↓	327	397	↓		-27"Hg / -1"Hg
SS-2D		197	397			-27"Hg / -1"Hg
SS-3		495	377			-28"Hg / 0"Hg
OA		334	293			-28"Hg / -2"Hg

Chain of Custody	Print Name	Signature	Date/Time
Sampled by:	JOSHUA D SANDBERG	[signature]	4/22/11 1305
Relinquished by:			
Received at Lab by:	David Linda	[signature]	4/22/2011

Courier: JS FedEx / UPS

** By Signing this Centek Labs COC you are accepting Terms and Conditions on Back.

p: (315) 431-9730 f: (315) 431-9731

C1104042 COC

CENTEK LABORATORIES, LLC

Sample Receipt Checklist

Client Name AECC

Date and Time Receive 4/22/2011

Work Order Numbe C1104042

Received by DL

Checklist completed by [signature] 04/22/2011 (Signature / Date)

Reviewed by [initials] 4/22/11 (Initials / Date)

Matrix:

Carrier name FedEx

Shipping container/cooler in good condition?	Yes ☑	No ☐	Not Presen ☐
Custody seals intact on shippping container/cooler?	Yes ☐	No ☐	Not Presen ☑
Custody seals intact on sample bottles?	Yes ☐	No ☐	Not Presen ☑
Chain of custody present?	Yes ☑	No ☐	
Chain of custody signed when relinquished and received?	Yes ☑	No ☐	
Chain of custody agrees with sample labels?	Yes ☑	No ☐	
Samples in proper container/bottle?	Yes ☑	No ☐	
Sample containers intact?	Yes ☑	No ☐	
Sufficient sample volume for indicated test?	Yes ☑	No ☐	
All samples received within holding time?	Yes ☑	No ☐	
Container/Temp Blank temperature in compliance?	Yes ☑	No ☐	
Water - VOA vials have zero headspace?	No VOA vials submitted ☑	Yes ☐	No ☐
Water - pH acceptable upon receipt?	Yes ☐	No ☑	

Adjusted? _____ Checked b _____

Any No and/or NA (not applicable) response must be detailed in the comments section be

Client contacted _____ Date contacted: _____ Person contacted _____

Contacted by: _____ Regarding: _____

Comments: _____

Corrective Action _____

CENTEK LABORATORIES, LLC

Date: *02-May-11*

CLIENT: Asbetos & Environmental Consulting Corpo
Project: Auburn - Kalet Bldg - Round II - 11-109
Lab Order: C1104042

Work Order Sample Summary

Lab Sample ID	Client Sample ID	Tag Number	Collection Date	Date Received
C1104042-001A	SS-4	419,153	4/22/2011	4/22/2011
C1104042-002A	SS-5	327,397	4/22/2011	4/22/2011
C1104042-003A	SS-5D	197,397	4/22/2011	4/22/2011
C1104042-004A	SS-6	495,377	4/22/2011	4/22/2011
C1104042-005A	OA	334,293	4/22/2011	4/22/2011

Centek Laboratories, LLC

02-May-11

Lab Order: C1104042
Client: Asbetos & Environmental Consulting Corporation
Project: Auburn - Kalet Bldg - Round II - 1

DATES REPORT

Sample ID	Client Sample ID	Collection Date	Matrix	Test Name	TCLP Date	Prep Date	Analysis Date
C1104042-001A	SS-4	4/22/2011		1ug/M3 by Method TO15			4/27/2011
				1ug/M3 by Method TO15			4/26/2011
C1104042-002A	SS-5			1ug/M3 by Method TO15			4/27/2011
				1ug/M3 by Method TO15			4/26/2011
C1104042-003A	SS-5D			1ug/M3 by Method TO15			4/27/2011
				1ug/M3 by Method TO15			4/26/2011
C1104042-004A	SS-6			1ug/M3 by Method TO15			4/27/2011
				1ug/M3 by Method TO15			4/26/2011
C1104042-005A	OA		Air	1ug/M3 by Method TO15			4/27/2011
				1ug/M3 by Method TO15			4/26/2011

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-4
Lab Order:	C1104042	**Tag Number:**	419,153
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-001A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
FIELD PARAMETERS		FLD				Analyst:
Lab Vacuum In	-1			"Hg		4/22/2011
Lab Vacuum Out	-29			"Hg		4/22/2011
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
1,1,1-Trichloroethane	0.12	0.15	J	ppbV	1	4/26/2011 8:07:00 PM
1,1,2,2-Tetrachloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,1,2-Trichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,1-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,1-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,2,4-Trichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,2,4-Trimethylbenzene	0.35	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,2-Dibromoethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,2-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,2-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,2-Dichloropropane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,3,5-Trimethylbenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,3-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,4-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
1,4-Dioxane	< 0.30	0.30		ppbV	1	4/26/2011 8:07:00 PM
2,2,4-trimethylpentane	0.36	0.15		ppbV	1	4/26/2011 8:07:00 PM
4-ethyltoluene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Acetone	16	3.0		ppbV	10	4/27/2011 4:59:00 AM
Allyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Benzene	5.3	1.5		ppbV	10	4/27/2011 4:59:00 AM
Benzyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Bromodichloromethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Bromoform	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Bromomethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Carbon disulfide	8.8	1.5		ppbV	10	4/27/2011 4:59:00 AM
Carbon tetrachloride	0.26	0.15		ppbV	1	4/26/2011 8:07:00 PM
Chlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Chloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Chloroform	2.8	1.5		ppbV	10	4/27/2011 4:59:00 AM
Chloromethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
cis-1,2-Dichloroethene	0.20	0.15		ppbV	1	4/26/2011 8:07:00 PM
cis-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Cyclohexane	16	1.5		ppbV	10	4/27/2011 4:59:00 AM
Dibromochloromethane	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Ethyl acetate	< 0.25	0.25		ppbV	1	4/26/2011 8:07:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-4
Lab Order:	C1104042	**Tag Number:**	419,153
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-001A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
Ethylbenzene	0.50	0.15		ppbV	1	4/26/2011 8:07:00 PM
Freon 11	0.50	0.15		ppbV	1	4/26/2011 8:07:00 PM
Freon 113	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Freon 114	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Freon 12	14	1.5		ppbV	10	4/27/2011 4:59:00 AM
Heptane	15	1.5		ppbV	10	4/27/2011 4:59:00 AM
Hexachloro-1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Hexane	26	1.5		ppbV	10	4/27/2011 4:59:00 AM
Isopropyl alcohol	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
m&p-Xylene	1.5	0.30		ppbV	1	4/26/2011 8:07:00 PM
Methyl Butyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 8:07:00 PM
Methyl Ethyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 8:07:00 PM
Methyl Isobutyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 8:07:00 PM
Methyl tert-butyl ether	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Methylene chloride	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
o-Xylene	0.48	0.15		ppbV	1	4/26/2011 8:07:00 PM
Propylene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Styrene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Tetrachloroethylene	0.43	0.15		ppbV	1	4/26/2011 8:07:00 PM
Tetrahydrofuran	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Toluene	4.2	1.5		ppbV	10	4/27/2011 4:59:00 AM
trans-1,2-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
trans-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Trichloroethene	0.83	0.15		ppbV	1	4/26/2011 8:07:00 PM
Vinyl acetate	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Vinyl Bromide	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Vinyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 8:07:00 PM
Surr: Bromofluorobenzene	102	70-130		%REC	1	4/26/2011 8:07:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-5
Lab Order:	C1104042	**Tag Number:**	327,397
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-002A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
FIELD PARAMETERS		FLD				Analyst:
Lab Vacuum In	-1			"Hg		4/22/2011
Lab Vacuum Out	-29			"Hg		4/22/2011
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
1,1,1-Trichloroethane	0.13	0.15	J	ppbV	1	4/26/2011 8:41:00 PM
1,1,2,2-Tetrachloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,1,2-Trichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,1-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,1-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,2,4-Trichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,2,4-Trimethylbenzene	0.29	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,2-Dibromoethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,2-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,2-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,2-Dichloropropane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,3,5-Trimethylbenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,3-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,4-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
1,4-Dioxane	< 0.30	0.30		ppbV	1	4/26/2011 8:41:00 PM
2,2,4-trimethylpentane	0.19	0.15		ppbV	1	4/26/2011 8:41:00 PM
4-ethyltoluene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Acetone	3.1	3.0		ppbV	10	4/27/2011 6:04:00 AM
Allyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Benzene	1.4	0.15		ppbV	1	4/26/2011 8:41:00 PM
Benzyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Bromodichloromethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Bromoform	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Bromomethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Carbon disulfide	0.53	0.15		ppbV	1	4/26/2011 8:41:00 PM
Carbon tetrachloride	1.2	0.15		ppbV	1	4/26/2011 8:41:00 PM
Chlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Chloroethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Chloroform	1.0	0.15		ppbV	1	4/26/2011 8:41:00 PM
Chloromethane	0.35	0.15		ppbV	1	4/26/2011 8:41:00 PM
cis-1,2-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
cis-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Cyclohexane	5.7	1.5		ppbV	10	4/27/2011 6:04:00 AM
Dibromochloromethane	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Ethyl acetate	< 0.25	0.25		ppbV	1	4/26/2011 8:41:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-5
Lab Order:	C1104042	**Tag Number:**	327,397
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-002A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		**TO-15**				Analyst: **RJP**
Ethylbenzene	0.25	0.15		ppbV	1	4/26/2011 8:41:00 PM
Freon 11	0.42	0.15		ppbV	1	4/26/2011 8:41:00 PM
Freon 113	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Freon 114	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Freon 12	14	1.5		ppbV	10	4/27/2011 6:04:00 AM
Heptane	3.9	1.5		ppbV	10	4/27/2011 6:04:00 AM
Hexachloro-1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Hexane	12	1.5		ppbV	10	4/27/2011 6:04:00 AM
Isopropyl alcohol	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
m&p-Xylene	0.73	0.30		ppbV	1	4/26/2011 8:41:00 PM
Methyl Butyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 8:41:00 PM
Methyl Ethyl Ketone	0.60	0.30		ppbV	1	4/26/2011 8:41:00 PM
Methyl Isobutyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 8:41:00 PM
Methyl tert-butyl ether	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Methylene chloride	0.44	0.15		ppbV	1	4/26/2011 8:41:00 PM
o-Xylene	0.25	0.15		ppbV	1	4/26/2011 8:41:00 PM
Propylene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Styrene	0.21	0.15		ppbV	1	4/26/2011 8:41:00 PM
Tetrachloroethylene	0.13	0.15	J	ppbV	1	4/26/2011 8:41:00 PM
Tetrahydrofuran	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Toluene	0.68	0.15		ppbV	1	4/26/2011 8:41:00 PM
trans-1,2-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
trans-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Trichloroethene	0.35	0.15		ppbV	1	4/26/2011 8:41:00 PM
Vinyl acetate	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Vinyl Bromide	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Vinyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 8:41:00 PM
Surr: Bromofluorobenzene	105	70-130		%REC	1	4/26/2011 8:41:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-5D
Lab Order:	C1104042	**Tag Number:**	197,397
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-003A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
FIELD PARAMETERS		FLD				Analyst:
Lab Vacuum In	-1			"Hg		4/22/2011
Lab Vacuum Out	-29			"Hg		4/22/2011
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
1,1,1-Trichloroethane	0.38	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,1,2,2-Tetrachloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,1,2-Trichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,1-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,1-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,2,4-Trichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,2,4-Trimethylbenzene	0.29	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,2-Dibromoethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,2-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,2-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,2-Dichloropropane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,3,5-Trimethylbenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,3-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,4-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
1,4-Dioxane	< 0.30	0.30		ppbV	1	4/26/2011 9:15:00 PM
2,2,4-trimethylpentane	0.23	0.15		ppbV	1	4/26/2011 9:15:00 PM
4-ethyltoluene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Acetone	5.5	3.0		ppbV	10	4/27/2011 7:09:00 AM
Allyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Benzene	1.5	0.15		ppbV	1	4/26/2011 9:15:00 PM
Benzyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Bromodichloromethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Bromoform	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Bromomethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Carbon disulfide	0.60	0.15		ppbV	1	4/26/2011 9:15:00 PM
Carbon tetrachloride	1.3	0.15		ppbV	1	4/26/2011 9:15:00 PM
Chlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Chloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Chloroform	1.1	0.15		ppbV	1	4/26/2011 9:15:00 PM
Chloromethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
cis-1,2-Dichloroethene	0.11	0.15	J	ppbV	1	4/26/2011 9:15:00 PM
cis-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Cyclohexane	6.4	1.5		ppbV	10	4/27/2011 7:09:00 AM
Dibromochloromethane	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Ethyl acetate	< 0.25	0.25		ppbV	1	4/26/2011 9:15:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-5D
Lab Order:	C1104042	**Tag Number:**	197,397
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-003A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
Ethylbenzene	0.28	0.15		ppbV	1	4/26/2011 9:15:00 PM
Freon 11	0.69	0.15		ppbV	1	4/26/2011 9:15:00 PM
Freon 113	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Freon 114	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Freon 12	15	1.5		ppbV	10	4/27/2011 7:09:00 AM
Heptane	4.0	1.5		ppbV	10	4/27/2011 7:09:00 AM
Hexachloro-1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Hexane	12	1.5		ppbV	10	4/27/2011 7:09:00 AM
Isopropyl alcohol	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
m&p-Xylene	0.81	0.30		ppbV	1	4/26/2011 9:15:00 PM
Methyl Butyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 9:15:00 PM
Methyl Ethyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 9:15:00 PM
Methyl Isobutyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 9:15:00 PM
Methyl tert-butyl ether	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Methylene chloride	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
o-Xylene	0.27	0.15		ppbV	1	4/26/2011 9:15:00 PM
Propylene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Styrene	0.22	0.15		ppbV	1	4/26/2011 9:15:00 PM
Tetrachloroethylene	0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Tetrahydrofuran	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Toluene	0.81	0.15		ppbV	1	4/26/2011 9:15:00 PM
trans-1,2-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
trans-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Trichloroethene	0.37	0.15		ppbV	1	4/26/2011 9:15:00 PM
Vinyl acetate	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Vinyl Bromide	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Vinyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 9:15:00 PM
Surr: Bromofluorobenzene	99.0	70-130		%REC	1	4/26/2011 9:15:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-6
Lab Order:	C1104042	**Tag Number:**	495,377
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-004A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
FIELD PARAMETERS		FLD				Analyst:
Lab Vacuum In	-1			"Hg		4/22/2011
Lab Vacuum Out	-29			"Hg		4/22/2011
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
1,1,1-Trichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,1,2,2-Tetrachloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,1,2-Trichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,1-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,1-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,2,4-Trichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,2,4-Trimethylbenzene	0.55	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,2-Dibromoethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,2-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,2-Dichloroethane	0.37	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,2-Dichloropropane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,3,5-Trimethylbenzene	0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,3-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,4-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
1,4-Dioxane	< 0.30	0.30		ppbV	1	4/26/2011 9:49:00 PM
2,2,4-trimethylpentane	0.13	0.15	J	ppbV	1	4/26/2011 9:49:00 PM
4-ethyltoluene	0.12	0.15	J	ppbV	1	4/26/2011 9:49:00 PM
Acetone	17	3.0		ppbV	10	4/27/2011 8:15:00 AM
Allyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Benzene	1.9	0.15		ppbV	1	4/26/2011 9:49:00 PM
Benzyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Bromodichloromethane	0.21	0.15		ppbV	1	4/26/2011 9:49:00 PM
Bromoform	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Bromomethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Carbon disulfide	2.4	1.5		ppbV	10	4/27/2011 8:15:00 AM
Carbon tetrachloride	0.65	0.15		ppbV	1	4/26/2011 9:49:00 PM
Chlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Chloroethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Chloroform	6.2	1.5		ppbV	10	4/27/2011 8:15:00 AM
Chloromethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
cis-1,2-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
cis-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Cyclohexane	3.9	1.5		ppbV	10	4/27/2011 8:15:00 AM
Dibromochloromethane	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Ethyl acetate	< 0.25	0.25		ppbV	1	4/26/2011 9:49:00 PM

Qualifiers:

- ** Reporting Limit
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- JN Non-routine analyte. Quantitation estimated.
- S Spike Recovery outside accepted recovery limits
- . Results reported are not blank corrected
- E Value above quantitation range
- J Analyte detected at or below quantitation limits
- ND Not Detected at the Reporting Limit

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-6
Lab Order:	C1104042	**Tag Number:**	495,377
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-004A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
Ethylbenzene	0.73	0.15		ppbV	1	4/26/2011 9:49:00 PM
Freon 11	0.23	0.15		ppbV	1	4/26/2011 9:49:00 PM
Freon 113	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Freon 114	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Freon 12	0.57	0.15		ppbV	1	4/26/2011 9:49:00 PM
Heptane	4.0	1.5		ppbV	10	4/27/2011 8:15:00 AM
Hexachloro-1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Hexane	7.9	1.5		ppbV	10	4/27/2011 8:15:00 AM
Isopropyl alcohol	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
m&p-Xylene	2.5	0.30		ppbV	1	4/26/2011 9:49:00 PM
Methyl Butyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 9:49:00 PM
Methyl Ethyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 9:49:00 PM
Methyl Isobutyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 9:49:00 PM
Methyl tert-butyl ether	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Methylene chloride	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
o-Xylene	0.78	0.15		ppbV	1	4/26/2011 9:49:00 PM
Propylene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Styrene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Tetrachloroethylene	0.41	0.15		ppbV	1	4/26/2011 9:49:00 PM
Tetrahydrofuran	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Toluene	1.6	0.15		ppbV	1	4/26/2011 9:49:00 PM
trans-1,2-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
trans-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Trichloroethene	1.1	0.15		ppbV	1	4/26/2011 9:49:00 PM
Vinyl acetate	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Vinyl Bromide	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Vinyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 9:49:00 PM
Surr: Bromofluorobenzene	103	70-130		%REC	1	4/26/2011 9:49:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	OA
Lab Order:	C1104042	**Tag Number:**	334,293
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-005A	**Matrix:**	AIR

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
FIELD PARAMETERS		FLD				Analyst:
Lab Vacuum In	-1			"Hg		4/22/2011
Lab Vacuum Out	-29			"Hg		4/22/2011
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
1,1,1-Trichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,1,2,2-Tetrachloroethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,1,2-Trichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,1-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,1-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,2,4-Trichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,2,4-Trimethylbenzene	0.24	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,2-Dibromoethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,2-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,2-Dichloroethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,2-Dichloropropane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,3,5-Trimethylbenzene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,3-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,4-Dichlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
1,4-Dioxane	< 0.30	0.30		ppbV	1	4/26/2011 7:34:00 PM
2,2,4-trimethylpentane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
4-ethyltoluene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Acetone	5.5	1.5		ppbV	5	4/27/2011 4:26:00 AM
Allyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Benzene	0.17	0.15		ppbV	1	4/26/2011 7:34:00 PM
Benzyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Bromodichloromethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Bromoform	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Bromomethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Carbon disulfide	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Carbon tetrachloride	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Chlorobenzene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Chloroethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Chloroform	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Chloromethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
cis-1,2-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
cis-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Cyclohexane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Dibromochloromethane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Ethyl acetate	< 0.25	0.25		ppbV	1	4/26/2011 7:34:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	OA
Lab Order:	C1104042	**Tag Number:**	334,293
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-005A	**Matrix:**	AIR

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		**TO-15**				Analyst: **RJP**
Ethylbenzene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Freon 11	0.20	0.15		ppbV	1	4/26/2011 7:34:00 PM
Freon 113	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Freon 114	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Freon 12	0.46	0.15		ppbV	1	4/26/2011 7:34:00 PM
Heptane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Hexachloro-1,3-butadiene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Hexane	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Isopropyl alcohol	1.4	0.15		ppbV	1	4/26/2011 7:34:00 PM
m&p-Xylene	0.22	0.30	J	ppbV	1	4/26/2011 7:34:00 PM
Methyl Butyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 7:34:00 PM
Methyl Ethyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 7:34:00 PM
Methyl Isobutyl Ketone	< 0.30	0.30		ppbV	1	4/26/2011 7:34:00 PM
Methyl tert-butyl ether	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Methylene chloride	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
o-Xylene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Propylene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Styrene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Tetrachloroethylene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Tetrahydrofuran	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Toluene	0.20	0.15		ppbV	1	4/26/2011 7:34:00 PM
trans-1,2-Dichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
trans-1,3-Dichloropropene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Trichloroethene	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Vinyl acetate	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Vinyl Bromide	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Vinyl chloride	< 0.15	0.15		ppbV	1	4/26/2011 7:34:00 PM
Surr: Bromofluorobenzene	102	70-130		%REC	1	4/26/2011 7:34:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-4
Lab Order:	C1104042	**Tag Number:**	419,153
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-001A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
1,1,1-Trichloroethane	0.67	0.83	J	ug/m3	1	4/26/2011 8:07:00 PM
1,1,2,2-Tetrachloroethane	< 1.0	1.0		ug/m3	1	4/26/2011 8:07:00 PM
1,1,2-Trichloroethane	< 0.83	0.83		ug/m3	1	4/26/2011 8:07:00 PM
1,1-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 8:07:00 PM
1,1-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 8:07:00 PM
1,2,4-Trichlorobenzene	< 1.1	1.1		ug/m3	1	4/26/2011 8:07:00 PM
1,2,4-Trimethylbenzene	1.7	0.75		ug/m3	1	4/26/2011 8:07:00 PM
1,2-Dibromoethane	< 1.2	1.2		ug/m3	1	4/26/2011 8:07:00 PM
1,2-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 8:07:00 PM
1,2-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 8:07:00 PM
1,2-Dichloropropane	< 0.70	0.70		ug/m3	1	4/26/2011 8:07:00 PM
1,3,5-Trimethylbenzene	< 0.75	0.75		ug/m3	1	4/26/2011 8:07:00 PM
1,3-butadiene	< 0.34	0.34		ug/m3	1	4/26/2011 8:07:00 PM
1,3-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 8:07:00 PM
1,4-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 8:07:00 PM
1,4-Dioxane	< 1.1	1.1		ug/m3	1	4/26/2011 8:07:00 PM
2,2,4-trimethylpentane	1.7	0.71		ug/m3	1	4/26/2011 8:07:00 PM
4-ethyltoluene	< 0.75	0.75		ug/m3	1	4/26/2011 8:07:00 PM
Acetone	39	7.2		ug/m3	10	4/27/2011 4:59:00 AM
Allyl chloride	< 0.48	0.48		ug/m3	1	4/26/2011 8:07:00 PM
Benzene	17	4.9		ug/m3	10	4/27/2011 4:59:00 AM
Benzyl chloride	< 0.88	0.88		ug/m3	1	4/26/2011 8:07:00 PM
Bromodichloromethane	< 1.0	1.0		ug/m3	1	4/26/2011 8:07:00 PM
Bromoform	< 1.6	1.6		ug/m3	1	4/26/2011 8:07:00 PM
Bromomethane	< 0.59	0.59		ug/m3	1	4/26/2011 8:07:00 PM
Carbon disulfide	28	4.7		ug/m3	10	4/27/2011 4:59:00 AM
Carbon tetrachloride	1.7	0.96		ug/m3	1	4/26/2011 8:07:00 PM
Chlorobenzene	< 0.70	0.70		ug/m3	1	4/26/2011 8:07:00 PM
Chloroethane	< 0.40	0.40		ug/m3	1	4/26/2011 8:07:00 PM
Chloroform	14	7.4		ug/m3	10	4/27/2011 4:59:00 AM
Chloromethane	< 0.31	0.31		ug/m3	1	4/26/2011 8:07:00 PM
cis-1,2-Dichloroethene	0.81	0.60		ug/m3	1	4/26/2011 8:07:00 PM
cis-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 8:07:00 PM
Cyclohexane	54	5.2		ug/m3	10	4/27/2011 4:59:00 AM
Dibromochloromethane	< 1.3	1.3		ug/m3	1	4/26/2011 8:07:00 PM
Ethyl acetate	< 0.92	0.92		ug/m3	1	4/26/2011 8:07:00 PM
Ethylbenzene	2.2	0.66		ug/m3	1	4/26/2011 8:07:00 PM
Freon 11	2.9	0.86		ug/m3	1	4/26/2011 8:07:00 PM
Freon 113	< 1.2	1.2		ug/m3	1	4/26/2011 8:07:00 PM
Freon 114	< 1.1	1.1		ug/m3	1	4/26/2011 8:07:00 PM

Qualifiers:

- ** Reporting Limit
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- JN Non-routine analyte. Quantitation estimated.
- S Spike Recovery outside accepted recovery limits
- . Results reported are not blank corrected
- E Value above quantitation range
- J Analyte detected at or below quantitation limits
- ND Not Detected at the Reporting Limit

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-4
Lab Order:	C1104042	**Tag Number:**	419,153
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-001A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
Freon 12	71	7.5		ug/m3	10	4/27/2011 4:59:00 AM
Heptane	63	6.2		ug/m3	10	4/27/2011 4:59:00 AM
Hexachloro-1,3-butadiene	< 1.6	1.6		ug/m3	1	4/26/2011 8:07:00 PM
Hexane	94	5.4		ug/m3	10	4/27/2011 4:59:00 AM
Isopropyl alcohol	< 0.37	0.37		ug/m3	1	4/26/2011 8:07:00 PM
m&p-Xylene	6.7	1.3		ug/m3	1	4/26/2011 8:07:00 PM
Methyl Butyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 8:07:00 PM
Methyl Ethyl Ketone	< 0.90	0.90		ug/m3	1	4/26/2011 8:07:00 PM
Methyl Isobutyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 8:07:00 PM
Methyl tert-butyl ether	< 0.55	0.55		ug/m3	1	4/26/2011 8:07:00 PM
Methylene chloride	< 0.53	0.53		ug/m3	1	4/26/2011 8:07:00 PM
o-Xylene	2.1	0.66		ug/m3	1	4/26/2011 8:07:00 PM
Propylene	< 0.26	0.26		ug/m3	1	4/26/2011 8:07:00 PM
Styrene	< 0.65	0.65		ug/m3	1	4/26/2011 8:07:00 PM
Tetrachloroethylene	3.0	1.0		ug/m3	1	4/26/2011 8:07:00 PM
Tetrahydrofuran	< 0.45	0.45		ug/m3	1	4/26/2011 8:07:00 PM
Toluene	16	5.7		ug/m3	10	4/27/2011 4:59:00 AM
trans-1,2-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 8:07:00 PM
trans-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 8:07:00 PM
Trichloroethene	4.5	0.82		ug/m3	1	4/26/2011 8:07:00 PM
Vinyl acetate	< 0.54	0.54		ug/m3	1	4/26/2011 8:07:00 PM
Vinyl Bromide	< 0.67	0.67		ug/m3	1	4/26/2011 8:07:00 PM
Vinyl chloride	< 0.39	0.39		ug/m3	1	4/26/2011 8:07:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-5
Lab Order:	C1104042	**Tag Number:**	327,397
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-002A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		**TO-15**				Analyst: **RJP**
1,1,1-Trichloroethane	0.72	0.83	J	ug/m3	1	4/26/2011 8:41:00 PM
1,1,2,2-Tetrachloroethane	< 1.0	1.0		ug/m3	1	4/26/2011 8:41:00 PM
1,1,2-Trichloroethane	< 0.83	0.83		ug/m3	1	4/26/2011 8:41:00 PM
1,1-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 8:41:00 PM
1,1-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 8:41:00 PM
1,2,4-Trichlorobenzene	< 1.1	1.1		ug/m3	1	4/26/2011 8:41:00 PM
1,2,4-Trimethylbenzene	1.4	0.75		ug/m3	1	4/26/2011 8:41:00 PM
1,2-Dibromoethane	< 1.2	1.2		ug/m3	1	4/26/2011 8:41:00 PM
1,2-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 8:41:00 PM
1,2-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 8:41:00 PM
1,2-Dichloropropane	< 0.70	0.70		ug/m3	1	4/26/2011 8:41:00 PM
1,3,5-Trimethylbenzene	< 0.75	0.75		ug/m3	1	4/26/2011 8:41:00 PM
1,3-butadiene	< 0.34	0.34		ug/m3	1	4/26/2011 8:41:00 PM
1,3-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 8:41:00 PM
1,4-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 8:41:00 PM
1,4-Dioxane	< 1.1	1.1		ug/m3	1	4/26/2011 8:41:00 PM
2,2,4-trimethylpentane	0.90	0.71		ug/m3	1	4/26/2011 8:41:00 PM
4-ethyltoluene	< 0.75	0.75		ug/m3	1	4/26/2011 8:41:00 PM
Acetone	7.5	7.2		ug/m3	10	4/27/2011 6:04:00 AM
Allyl chloride	< 0.48	0.48		ug/m3	1	4/26/2011 8:41:00 PM
Benzene	4.6	0.49		ug/m3	1	4/26/2011 8:41:00 PM
Benzyl chloride	< 0.88	0.88		ug/m3	1	4/26/2011 8:41:00 PM
Bromodichloromethane	< 1.0	1.0		ug/m3	1	4/26/2011 8:41:00 PM
Bromoform	< 1.6	1.6		ug/m3	1	4/26/2011 8:41:00 PM
Bromomethane	< 0.59	0.59		ug/m3	1	4/26/2011 8:41:00 PM
Carbon disulfide	1.7	0.47		ug/m3	1	4/26/2011 8:41:00 PM
Carbon tetrachloride	7.5	0.96		ug/m3	1	4/26/2011 8:41:00 PM
Chlorobenzene	< 0.70	0.70		ug/m3	1	4/26/2011 8:41:00 PM
Chloroethane	< 0.40	0.40		ug/m3	1	4/26/2011 8:41:00 PM
Chloroform	5.1	0.74		ug/m3	1	4/26/2011 8:41:00 PM
Chloromethane	0.73	0.31		ug/m3	1	4/26/2011 8:41:00 PM
cis-1,2-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 8:41:00 PM
cis-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 8:41:00 PM
Cyclohexane	20	5.2		ug/m3	10	4/27/2011 6:04:00 AM
Dibromochloromethane	< 1.3	1.3		ug/m3	1	4/26/2011 8:41:00 PM
Ethyl acetate	< 0.92	0.92		ug/m3	1	4/26/2011 8:41:00 PM
Ethylbenzene	1.1	0.66		ug/m3	1	4/26/2011 8:41:00 PM
Freon 11	2.4	0.86		ug/m3	1	4/26/2011 8:41:00 PM
Freon 113	< 1.2	1.2		ug/m3	1	4/26/2011 8:41:00 PM
Freon 114	< 1.1	1.1		ug/m3	1	4/26/2011 8:41:00 PM

Qualifiers:

- ** Reporting Limit
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- JN Non-routine analyte. Quantitation estimated.
- S Spike Recovery outside accepted recovery limits
- . Results reported are not blank corrected
- E Value above quantitation range
- J Analyte detected at or below quantitation limits
- ND Not Detected at the Reporting Limit

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-5
Lab Order:	C1104042	**Tag Number:**	327,397
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-002A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
Freon 12	68	7.5		ug/m3	10	4/27/2011 6:04:00 AM
Heptane	16	6.2		ug/m3	10	4/27/2011 6:04:00 AM
Hexachloro-1,3-butadiene	< 1.6	1.6		ug/m3	1	4/26/2011 8:41:00 PM
Hexane	42	5.4		ug/m3	10	4/27/2011 6:04:00 AM
Isopropyl alcohol	< 0.37	0.37		ug/m3	1	4/26/2011 8:41:00 PM
m&p-Xylene	3.2	1.3		ug/m3	1	4/26/2011 8:41:00 PM
Methyl Butyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 8:41:00 PM
Methyl Ethyl Ketone	1.8	0.90		ug/m3	1	4/26/2011 8:41:00 PM
Methyl Isobutyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 8:41:00 PM
Methyl tert-butyl ether	< 0.55	0.55		ug/m3	1	4/26/2011 8:41:00 PM
Methylene chloride	1.6	0.53		ug/m3	1	4/26/2011 8:41:00 PM
o-Xylene	1.1	0.66		ug/m3	1	4/26/2011 8:41:00 PM
Propylene	< 0.26	0.26		ug/m3	1	4/26/2011 8:41:00 PM
Styrene	0.91	0.65		ug/m3	1	4/26/2011 8:41:00 PM
Tetrachloroethylene	0.90	1.0	J	ug/m3	1	4/26/2011 8:41:00 PM
Tetrahydrofuran	< 0.45	0.45		ug/m3	1	4/26/2011 8:41:00 PM
Toluene	2.6	0.57		ug/m3	1	4/26/2011 8:41:00 PM
trans-1,2-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 8:41:00 PM
trans-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 8:41:00 PM
Trichloroethene	1.9	0.82		ug/m3	1	4/26/2011 8:41:00 PM
Vinyl acetate	< 0.54	0.54		ug/m3	1	4/26/2011 8:41:00 PM
Vinyl Bromide	< 0.67	0.67		ug/m3	1	4/26/2011 8:41:00 PM
Vinyl chloride	< 0.39	0.39		ug/m3	1	4/26/2011 8:41:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-5D
Lab Order:	C1104042	**Tag Number:**	197,397
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-003A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
1,1,1-Trichloroethane	2.1	0.83		ug/m3	1	4/26/2011 9:15:00 PM
1,1,2,2-Tetrachloroethane	< 1.0	1.0		ug/m3	1	4/26/2011 9:15:00 PM
1,1,2-Trichloroethane	< 0.83	0.83		ug/m3	1	4/26/2011 9:15:00 PM
1,1-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 9:15:00 PM
1,1-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 9:15:00 PM
1,2,4-Trichlorobenzene	< 1.1	1.1		ug/m3	1	4/26/2011 9:15:00 PM
1,2,4-Trimethylbenzene	1.4	0.75		ug/m3	1	4/26/2011 9:15:00 PM
1,2-Dibromoethane	< 1.2	1.2		ug/m3	1	4/26/2011 9:15:00 PM
1,2-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 9:15:00 PM
1,2-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 9:15:00 PM
1,2-Dichloropropane	< 0.70	0.70		ug/m3	1	4/26/2011 9:15:00 PM
1,3,5-Trimethylbenzene	< 0.75	0.75		ug/m3	1	4/26/2011 9:15:00 PM
1,3-butadiene	< 0.34	0.34		ug/m3	1	4/26/2011 9:15:00 PM
1,3-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 9:15:00 PM
1,4-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 9:15:00 PM
1,4-Dioxane	< 1.1	1.1		ug/m3	1	4/26/2011 9:15:00 PM
2,2,4-trimethylpentane	1.1	0.71		ug/m3	1	4/26/2011 9:15:00 PM
4-ethyltoluene	< 0.75	0.75		ug/m3	1	4/26/2011 9:15:00 PM
Acetone	13	7.2		ug/m3	10	4/27/2011 7:09:00 AM
Allyl chloride	< 0.48	0.48		ug/m3	1	4/26/2011 9:15:00 PM
Benzene	5.0	0.49		ug/m3	1	4/26/2011 9:15:00 PM
Benzyl chloride	< 0.88	0.88		ug/m3	1	4/26/2011 9:15:00 PM
Bromodichloromethane	< 1.0	1.0		ug/m3	1	4/26/2011 9:15:00 PM
Bromoform	< 1.6	1.6		ug/m3	1	4/26/2011 9:15:00 PM
Bromomethane	< 0.59	0.59		ug/m3	1	4/26/2011 9:15:00 PM
Carbon disulfide	1.9	0.47		ug/m3	1	4/26/2011 9:15:00 PM
Carbon tetrachloride	8.2	0.96		ug/m3	1	4/26/2011 9:15:00 PM
Chlorobenzene	< 0.70	0.70		ug/m3	1	4/26/2011 9:15:00 PM
Chloroethane	< 0.40	0.40		ug/m3	1	4/26/2011 9:15:00 PM
Chloroform	5.5	0.74		ug/m3	1	4/26/2011 9:15:00 PM
Chloromethane	< 0.31	0.31		ug/m3	1	4/26/2011 9:15:00 PM
cis-1,2-Dichloroethene	0.44	0.60	J	ug/m3	1	4/26/2011 9:15:00 PM
cis-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 9:15:00 PM
Cyclohexane	22	5.2		ug/m3	10	4/27/2011 7:09:00 AM
Dibromochloromethane	< 1.3	1.3		ug/m3	1	4/26/2011 9:15:00 PM
Ethyl acetate	< 0.92	0.92		ug/m3	1	4/26/2011 9:15:00 PM
Ethylbenzene	1.2	0.66		ug/m3	1	4/26/2011 9:15:00 PM
Freon 11	3.9	0.86		ug/m3	1	4/26/2011 9:15:00 PM
Freon 113	< 1.2	1.2		ug/m3	1	4/26/2011 9:15:00 PM
Freon 114	< 1.1	1.1		ug/m3	1	4/26/2011 9:15:00 PM

Qualifiers:

- ** Reporting Limit
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- JN Non-routine analyte. Quantitation estimated.
- S Spike Recovery outside accepted recovery limits
- . Results reported are not blank corrected
- E Value above quantitation range
- J Analyte detected at or below quantitation limits
- ND Not Detected at the Reporting Limit

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-5D
Lab Order:	C1104042	**Tag Number:**	197,397
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-003A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
Freon 12	77	7.5		ug/m3	10	4/27/2011 7:09:00 AM
Heptane	17	6.2		ug/m3	10	4/27/2011 7:09:00 AM
Hexachloro-1,3-butadiene	< 1.6	1.6		ug/m3	1	4/26/2011 9:15:00 PM
Hexane	44	5.4		ug/m3	10	4/27/2011 7:09:00 AM
Isopropyl alcohol	< 0.37	0.37		ug/m3	1	4/26/2011 9:15:00 PM
m&p-Xylene	3.6	1.3		ug/m3	1	4/26/2011 9:15:00 PM
Methyl Butyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 9:15:00 PM
Methyl Ethyl Ketone	< 0.90	0.90		ug/m3	1	4/26/2011 9:15:00 PM
Methyl Isobutyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 9:15:00 PM
Methyl tert-butyl ether	< 0.55	0.55		ug/m3	1	4/26/2011 9:15:00 PM
Methylene chloride	< 0.53	0.53		ug/m3	1	4/26/2011 9:15:00 PM
o-Xylene	1.2	0.66		ug/m3	1	4/26/2011 9:15:00 PM
Propylene	< 0.26	0.26		ug/m3	1	4/26/2011 9:15:00 PM
Styrene	0.95	0.65		ug/m3	1	4/26/2011 9:15:00 PM
Tetrachloroethylene	1.0	1.0		ug/m3	1	4/26/2011 9:15:00 PM
Tetrahydrofuran	< 0.45	0.45		ug/m3	1	4/26/2011 9:15:00 PM
Toluene	3.1	0.57		ug/m3	1	4/26/2011 9:15:00 PM
trans-1,2-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 9:15:00 PM
trans-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 9:15:00 PM
Trichloroethene	2.0	0.82		ug/m3	1	4/26/2011 9:15:00 PM
Vinyl acetate	< 0.54	0.54		ug/m3	1	4/26/2011 9:15:00 PM
Vinyl Bromide	< 0.67	0.67		ug/m3	1	4/26/2011 9:15:00 PM
Vinyl chloride	< 0.39	0.39		ug/m3	1	4/26/2011 9:15:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-6
Lab Order:	C1104042	**Tag Number:**	495,377
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-004A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		**TO-15**				Analyst: RJP
1,1,1-Trichloroethane	< 0.83	0.83		ug/m3	1	4/26/2011 9:49:00 PM
1,1,2,2-Tetrachloroethane	< 1.0	1.0		ug/m3	1	4/26/2011 9:49:00 PM
1,1,2-Trichloroethane	< 0.83	0.83		ug/m3	1	4/26/2011 9:49:00 PM
1,1-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 9:49:00 PM
1,1-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 9:49:00 PM
1,2,4-Trichlorobenzene	< 1.1	1.1		ug/m3	1	4/26/2011 9:49:00 PM
1,2,4-Trimethylbenzene	2.7	0.75		ug/m3	1	4/26/2011 9:49:00 PM
1,2-Dibromoethane	< 1.2	1.2		ug/m3	1	4/26/2011 9:49:00 PM
1,2-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 9:49:00 PM
1,2-Dichloroethane	1.5	0.62		ug/m3	1	4/26/2011 9:49:00 PM
1,2-Dichloropropane	< 0.70	0.70		ug/m3	1	4/26/2011 9:49:00 PM
1,3,5-Trimethylbenzene	0.75	0.75		ug/m3	1	4/26/2011 9:49:00 PM
1,3-butadiene	< 0.34	0.34		ug/m3	1	4/26/2011 9:49:00 PM
1,3-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 9:49:00 PM
1,4-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 9:49:00 PM
1,4-Dioxane	< 1.1	1.1		ug/m3	1	4/26/2011 9:49:00 PM
2,2,4-trimethylpentane	0.62	0.71	J	ug/m3	1	4/26/2011 9:49:00 PM
4-ethyltoluene	0.60	0.75	J	ug/m3	1	4/26/2011 9:49:00 PM
Acetone	41	7.2		ug/m3	10	4/27/2011 8:15:00 AM
Allyl chloride	< 0.48	0.48		ug/m3	1	4/26/2011 9:49:00 PM
Benzene	6.1	0.49		ug/m3	1	4/26/2011 9:49:00 PM
Benzyl chloride	< 0.88	0.88		ug/m3	1	4/26/2011 9:49:00 PM
Bromodichloromethane	1.4	1.0		ug/m3	1	4/26/2011 9:49:00 PM
Bromoform	< 1.6	1.6		ug/m3	1	4/26/2011 9:49:00 PM
Bromomethane	< 0.59	0.59		ug/m3	1	4/26/2011 9:49:00 PM
Carbon disulfide	7.6	4.7		ug/m3	10	4/27/2011 8:15:00 AM
Carbon tetrachloride	4.2	0.96		ug/m3	1	4/26/2011 9:49:00 PM
Chlorobenzene	< 0.70	0.70		ug/m3	1	4/26/2011 9:49:00 PM
Chloroethane	< 0.40	0.40		ug/m3	1	4/26/2011 9:49:00 PM
Chloroform	31	7.4		ug/m3	10	4/27/2011 8:15:00 AM
Chloromethane	< 0.31	0.31		ug/m3	1	4/26/2011 9:49:00 PM
cis-1,2-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 9:49:00 PM
cis-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 9:49:00 PM
Cyclohexane	14	5.2		ug/m3	10	4/27/2011 8:15:00 AM
Dibromochloromethane	< 1.3	1.3		ug/m3	1	4/26/2011 9:49:00 PM
Ethyl acetate	< 0.92	0.92		ug/m3	1	4/26/2011 9:49:00 PM
Ethylbenzene	3.2	0.66		ug/m3	1	4/26/2011 9:49:00 PM
Freon 11	1.3	0.86		ug/m3	1	4/26/2011 9:49:00 PM
Freon 113	< 1.2	1.2		ug/m3	1	4/26/2011 9:49:00 PM
Freon 114	< 1.1	1.1		ug/m3	1	4/26/2011 9:49:00 PM

Qualifiers:

- ** Reporting Limit
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- JN Non-routine analyte. Quantitation estimated.
- S Spike Recovery outside accepted recovery limits
- . Results reported are not blank corrected
- E Value above quantitation range
- J Analyte detected at or below quantitation limits
- ND Not Detected at the Reporting Limit

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	SS-6
Lab Order:	C1104042	**Tag Number:**	495,377
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-004A	**Matrix:**	

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		**TO-15**				Analyst: RJP
Freon 12	2.9	0.75		ug/m3	1	4/26/2011 9:49:00 PM
Heptane	17	6.2		ug/m3	10	4/27/2011 8:15:00 AM
Hexachloro-1,3-butadiene	< 1.6	1.6		ug/m3	1	4/26/2011 9:49:00 PM
Hexane	28	5.4		ug/m3	10	4/27/2011 8:15:00 AM
Isopropyl alcohol	< 0.37	0.37		ug/m3	1	4/26/2011 9:49:00 PM
m&p-Xylene	11	1.3		ug/m3	1	4/26/2011 9:49:00 PM
Methyl Butyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 9:49:00 PM
Methyl Ethyl Ketone	< 0.90	0.90		ug/m3	1	4/26/2011 9:49:00 PM
Methyl Isobutyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 9:49:00 PM
Methyl tert-butyl ether	< 0.55	0.55		ug/m3	1	4/26/2011 9:49:00 PM
Methylene chloride	< 0.53	0.53		ug/m3	1	4/26/2011 9:49:00 PM
o-Xylene	3.4	0.66		ug/m3	1	4/26/2011 9:49:00 PM
Propylene	< 0.26	0.26		ug/m3	1	4/26/2011 9:49:00 PM
Styrene	< 0.65	0.65		ug/m3	1	4/26/2011 9:49:00 PM
Tetrachloroethylene	2.8	1.0		ug/m3	1	4/26/2011 9:49:00 PM
Tetrahydrofuran	< 0.45	0.45		ug/m3	1	4/26/2011 9:49:00 PM
Toluene	6.3	0.57		ug/m3	1	4/26/2011 9:49:00 PM
trans-1,2-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 9:49:00 PM
trans-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 9:49:00 PM
Trichloroethene	5.8	0.82		ug/m3	1	4/26/2011 9:49:00 PM
Vinyl acetate	< 0.54	0.54		ug/m3	1	4/26/2011 9:49:00 PM
Vinyl Bromide	< 0.67	0.67		ug/m3	1	4/26/2011 9:49:00 PM
Vinyl chloride	< 0.39	0.39		ug/m3	1	4/26/2011 9:49:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	OA
Lab Order:	C1104042	**Tag Number:**	334,293
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-005A	**Matrix:**	AIR

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
1,1,1-Trichloroethane	< 0.83	0.83		ug/m3	1	4/26/2011 7:34:00 PM
1,1,2,2-Tetrachloroethane	< 1.0	1.0		ug/m3	1	4/26/2011 7:34:00 PM
1,1,2-Trichloroethane	< 0.83	0.83		ug/m3	1	4/26/2011 7:34:00 PM
1,1-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 7:34:00 PM
1,1-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 7:34:00 PM
1,2,4-Trichlorobenzene	< 1.1	1.1		ug/m3	1	4/26/2011 7:34:00 PM
1,2,4-Trimethylbenzene	1.2	0.75		ug/m3	1	4/26/2011 7:34:00 PM
1,2-Dibromoethane	< 1.2	1.2		ug/m3	1	4/26/2011 7:34:00 PM
1,2-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 7:34:00 PM
1,2-Dichloroethane	< 0.62	0.62		ug/m3	1	4/26/2011 7:34:00 PM
1,2-Dichloropropane	< 0.70	0.70		ug/m3	1	4/26/2011 7:34:00 PM
1,3,5-Trimethylbenzene	< 0.75	0.75		ug/m3	1	4/26/2011 7:34:00 PM
1,3-butadiene	< 0.34	0.34		ug/m3	1	4/26/2011 7:34:00 PM
1,3-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 7:34:00 PM
1,4-Dichlorobenzene	< 0.92	0.92		ug/m3	1	4/26/2011 7:34:00 PM
1,4-Dioxane	< 1.1	1.1		ug/m3	1	4/26/2011 7:34:00 PM
2,2,4-trimethylpentane	< 0.71	0.71		ug/m3	1	4/26/2011 7:34:00 PM
4-ethyltoluene	< 0.75	0.75		ug/m3	1	4/26/2011 7:34:00 PM
Acetone	13	3.6		ug/m3	5	4/27/2011 4:26:00 AM
Allyl chloride	< 0.48	0.48		ug/m3	1	4/26/2011 7:34:00 PM
Benzene	0.55	0.49		ug/m3	1	4/26/2011 7:34:00 PM
Benzyl chloride	< 0.88	0.88		ug/m3	1	4/26/2011 7:34:00 PM
Bromodichloromethane	< 1.0	1.0		ug/m3	1	4/26/2011 7:34:00 PM
Bromoform	< 1.6	1.6		ug/m3	1	4/26/2011 7:34:00 PM
Bromomethane	< 0.59	0.59		ug/m3	1	4/26/2011 7:34:00 PM
Carbon disulfide	< 0.47	0.47		ug/m3	1	4/26/2011 7:34:00 PM
Carbon tetrachloride	< 0.96	0.96		ug/m3	1	4/26/2011 7:34:00 PM
Chlorobenzene	< 0.70	0.70		ug/m3	1	4/26/2011 7:34:00 PM
Chloroethane	< 0.40	0.40		ug/m3	1	4/26/2011 7:34:00 PM
Chloroform	< 0.74	0.74		ug/m3	1	4/26/2011 7:34:00 PM
Chloromethane	< 0.31	0.31		ug/m3	1	4/26/2011 7:34:00 PM
cis-1,2-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 7:34:00 PM
cis-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 7:34:00 PM
Cyclohexane	< 0.52	0.52		ug/m3	1	4/26/2011 7:34:00 PM
Dibromochloromethane	< 1.3	1.3		ug/m3	1	4/26/2011 7:34:00 PM
Ethyl acetate	< 0.92	0.92		ug/m3	1	4/26/2011 7:34:00 PM
Ethylbenzene	< 0.66	0.66		ug/m3	1	4/26/2011 7:34:00 PM
Freon 11	1.1	0.86		ug/m3	1	4/26/2011 7:34:00 PM
Freon 113	< 1.2	1.2		ug/m3	1	4/26/2011 7:34:00 PM
Freon 114	< 1.1	1.1		ug/m3	1	4/26/2011 7:34:00 PM

Qualifiers:

- ** Reporting Limit
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- JN Non-routine analyte. Quantitation estimated.
- S Spike Recovery outside accepted recovery limits
- . Results reported are not blank corrected
- E Value above quantitation range
- J Analyte detected at or below quantitation limits
- ND Not Detected at the Reporting Limit

Centek Laboratories, LLC

Date: *02-May-11*

CLIENT:	Asbetos & Environmental Consulting Corpo	**Client Sample ID:**	OA
Lab Order:	C1104042	**Tag Number:**	334,293
Project:	Auburn - Kalet Bldg - Round II - 11-109	**Collection Date:**	4/22/2011
Lab ID:	C1104042-005A	**Matrix:**	AIR

Analyses	Result	**Limit	Qual	Units	DF	Date Analyzed
1UG/M3 BY METHOD TO15		TO-15				Analyst: RJP
Freon 12	2.3	0.75		ug/m3	1	4/26/2011 7:34:00 PM
Heptane	< 0.62	0.62		ug/m3	1	4/26/2011 7:34:00 PM
Hexachloro-1,3-butadiene	< 1.6	1.6		ug/m3	1	4/26/2011 7:34:00 PM
Hexane	< 0.54	0.54		ug/m3	1	4/26/2011 7:34:00 PM
Isopropyl alcohol	3.6	0.37		ug/m3	1	4/26/2011 7:34:00 PM
m&p-Xylene	0.97	1.3	J	ug/m3	1	4/26/2011 7:34:00 PM
Methyl Butyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 7:34:00 PM
Methyl Ethyl Ketone	< 0.90	0.90		ug/m3	1	4/26/2011 7:34:00 PM
Methyl Isobutyl Ketone	< 1.2	1.2		ug/m3	1	4/26/2011 7:34:00 PM
Methyl tert-butyl ether	< 0.55	0.55		ug/m3	1	4/26/2011 7:34:00 PM
Methylene chloride	< 0.53	0.53		ug/m3	1	4/26/2011 7:34:00 PM
o-Xylene	< 0.66	0.66		ug/m3	1	4/26/2011 7:34:00 PM
Propylene	< 0.26	0.26		ug/m3	1	4/26/2011 7:34:00 PM
Styrene	< 0.65	0.65		ug/m3	1	4/26/2011 7:34:00 PM
Tetrachloroethylene	< 1.0	1.0		ug/m3	1	4/26/2011 7:34:00 PM
Tetrahydrofuran	< 0.45	0.45		ug/m3	1	4/26/2011 7:34:00 PM
Toluene	0.77	0.57		ug/m3	1	4/26/2011 7:34:00 PM
trans-1,2-Dichloroethene	< 0.60	0.60		ug/m3	1	4/26/2011 7:34:00 PM
trans-1,3-Dichloropropene	< 0.69	0.69		ug/m3	1	4/26/2011 7:34:00 PM
Trichloroethene	< 0.82	0.82		ug/m3	1	4/26/2011 7:34:00 PM
Vinyl acetate	< 0.54	0.54		ug/m3	1	4/26/2011 7:34:00 PM
Vinyl Bromide	< 0.67	0.67		ug/m3	1	4/26/2011 7:34:00 PM
Vinyl chloride	< 0.39	0.39		ug/m3	1	4/26/2011 7:34:00 PM

Qualifiers:

**	Reporting Limit	.	Results reported are not blank corrected
B	Analyte detected in the associated Method Blank	E	Value above quantitation range
H	Holding times for preparation or analysis exceeded	J	Analyte detected at or below quantitation limits
JN	Non-routine analyte. Quantitation estimated.	ND	Not Detected at the Reporting Limit
S	Spike Recovery outside accepted recovery limits		